



LUX3R



LUX6R

Novasub has a range of LUX-R Mini LED lights with various power consumption and illumination level.


Novasub developed a serie LED light giving a high bright white flood light with daylight color temp. These flood light is ideal for video camera and gives a suburb illumination. The lights are house in a rugged stainless steel housing. Due to the use of LED's the lifetime is 50.000 hrs. Never change a bulb any more. The built in temp/power controller reduces the current to avoid any LED damage if the Mini light is kept on outside water.

Features


- Fully Kirby helmets & band mask compatible
- Small housing
- Extreme ruggedized
- Low power consumption

Applications

- Diver helmet mount
- Fixed installations
- Drop down systems

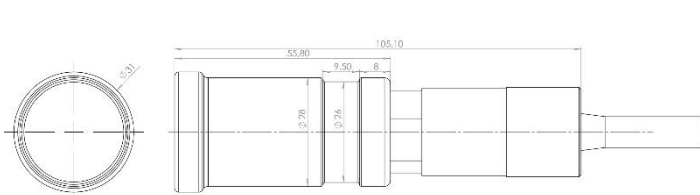

LUX3R

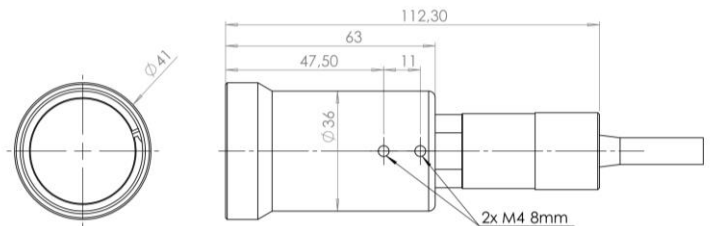

LUX6R

Specifications

Model	LUX3R	LUX3R22	LUX3R40	LUX6R
Lumen @ 6500 K	600			1200
Beam angle	120°	22°	40°	120°
Color Temp.	6500K			
LED's	3 x 3 w			6 x 3 w
Operational depth	600 m			
Material	Stainless steel 316			
Connector	Subconn/Birns, MCBH2M			
Control	Direct Control			
Protection	Auto. Temp. Control, No polarity		Auto. Temp. Control, Polarity protection	
Power	12-30 vdc (10 watt)		12-30 vdc (20 watt)	
Dimensions	50 mm x ø 30 – ø 33 mm		60 mm x ø 36 – ø 41 mm	
Weight	210 gr. (air), 150 gr. (water)		375 gr.(air),300 gr.(water)	
Connection for mounting	Jubilee clip in groove		2x M4 x5 mm thread	
Material options	-		Anodised Aluminium	

Related Products:

- SCC-1VT1L6-DVR
- Novasub brackets
- NSBC
- DLR3 cable
- P&T-CL-01

Distributed by: